© Siemens AG 2010

SIMATIC OP 77A

Overview

- Compact Operator Panel for operator control and monitoring of machines and plants
- Graphics in a new dimension – small and smart
- Pixel-graphics 4.5" LC display, monochrome
- 23 system keys, 8 freely-configurable and freely-inscribable function keys (4 with LEDs)
- All interfaces (e.g. MPI, PROFIBUS DP) are onboard interfaces.
- Together with OP 77B, successor of the successful OP7

Benefits

- High-contrast display for good readability
- Large keys for high operational safety
- Simple handling and configuring
- Integral component of Totally Integrated Automation (TIA): Increases productivity, minimizes the engineering outlay, reduces the lifecycle costs
- Reduction in service and startup costs thanks to maintenance-free design (no battery) and long service life of the backlighting
- Can be used worldwide:
  - 32 languages can be configured (including Asiatic and Cyrillic character sets)
  - Up to 5 languages are selectable online
  - Language-dependent texts and graphics
- Graphics library is available complete with ready-to-use display objects

Application

OP 77A Operator Panels can be used wherever machines and systems are controlled and monitored locally – in production, process and building automation alike. They are used in all types of sectors and applications.

Compatibility with OP7

- Same panel cutout as OP7
- Importing of OP7 configurations from ProTool/Lite, ProTool and ProTool/Pro
- Migration manual with description of most important changes to OP7 and ProTool

Design

- 4.5" LCD, 160 x 64 pixels, monochrome
- 23 system keys, 8 freely-configurable and freely-inscribable function keys (4 with LEDs)
- Numeric and alphanumeric input facilities
- Compact design with shallow installation depth
- Rugged plastic housing
- The front is resistant to various oils, greases and standard detergents
- Plug-type terminals for connection of a 24 V DC power supply
- RS 485 interface for process links (MPI, PROFIBUS DP up to 1.5 Mbit/s) and for downloading the configuration

Function

- Permanent window and template concept for creating screen templates
- Input / output fields
  for displaying and changing process parameters
- Function keys
  are used for directly actuating functions and actions. Up to 16 functions can be configured simultaneously on function keys.

© Siemens AG 2010

SIMATIC OP 77A

Function (continued)

- Graphics
  can be used as icons instead of text to "label" function keys or buttons. They can also be used as simple on-screen graphics. In the configuration tool, a library is available containing an extensive range of graphics and a wide variety of objects. All editors with an OLE interface can be used as graphics editors (such as PaintShop, Designer or CorelDraw).
- Predefined texts
  for labeling function keys, process images and process values in any character size
- Bars are used for the graphical display of dynamic values
- Display selection from the PLC
  supports operator prompting from the PLC
- Language selection during runtime
  - 5 online languages, 32 configuration languages incl. Asian and Cyrillic character sets
  - Language-dependent texts and graphics
- User administration (security) according to the requirements of the various sectors
  - Authentication with user ID and password
  - User-group-specific rights
- Signaling system
  - Freely definable message classes (e.g., status / fault messages) for definition of acknowledgment response and display of message events
  - Message history
- Recipe management
- Help texts
  for process images, messages and variables
- Arithmetic functions
- Limit value monitoring
  for reliable process control of inputs and outputs
- Indicator light
  for machine and plant status indication
- Scheduler for cyclic function execution
- Template concept;
  picture elements configured in the template appear in every picture
- Simple maintenance and configuration thanks to:
  - Backup and restoration of the configuration, operating system, data records and firmware on a PC using ProSave
  - Configuration download / upload using MPI / PROFIBUS DP and serially by using RS 485
  - Individual contrast settings
  - No batteries are necessary

Configuration

SIMATIC WinCC flexible Compact, Standard or Advanced configuration software Version 2004 SP1 and higher plus HSP is used for configuration.

For more information about engineering software, see HMI software / engineering software SIMATIC WinCC flexible.

Integration

The OP 77A can be connected to the following:

- SIMATIC S7-200 / -300-400
- SIMATIC WinAC Software/Slot PLC

Note:

For further information see "System interfaces".

Technical specifications

OP 77A	6AV6 641-0BA11-0AX1
Supply voltage	
Supply voltage	24 V DC
permissible range	+20.4 V ... +28.8 V DC
Rated current	0.2 A
Memory	
Type	Flash / RAM
Usable memory for user data	256 KByte usable memory for user data
Time of day	
Clock	
• Type	Software clock, not battery backed
Configuring	
Configuring tool	WinCC flexible Compact Version 2004 SP 1 or higher; HSP OP 77 (to be ordered separately)
Display	
Display type	STN, black / white
Size	4.5"
Resolution (WxH in pixel)	160 x 64
Backlighting	
• MTBF backlighting (at 25 °C)	about 100 000 hours
Operating mode	
Control elements	Membrane keyboard
Function keys, programmable	8 function keys, 4 with LEDs
Connection for mouse / keyboard / barcode reader	- / - / -
Touch operation	
• System keys	23
• Numeric / alphabetical input	Yes / Yes
Ambient conditions	
Mounting position	vertical
maximum permissible angle of inclination without external ventilation	+/- 80 °
max. relative humidity (in %)	90 %
Temperature	
• Operation (vertical installation)	0 °C ... +50 °C
• Operation (max. tilt angle)	0 °C ... +40 °C
• Transport, storage	-20 °C ... +60 °C
Degree of protection	
Front	IP65, NEMA 4x, NEMA 12 (when installed)
Rear	IP20
Certifications & standards	
Certifications	CE, GL, ABS, BV, DNV, LRS, FM Class I Div. 2, UL, CSA, cULus, EX-Zone 2 (available soon), EX-Zone 22 (available soon), C-TICK, NEMA 4x, NEMA 12
Type of output	
LED colors	Green

© Siemens AG 2010

Technical specifications

OP 77A	6AV6 641-0BA11-0AX1
Interfaces	
Interfaces	1 x RS422, 1 x RS485 (max. 1,5 MBit/s)
PC card slot / CF card slot	No / No
Multi Media Card slot	No
USB port	No
Industrial Ethernet interface	No
Operating systems	
Operating system	LINUX
Processor	
Processor	ARM
Functionality under WinCC flexible	
Task planner	Yes
Help system	Yes
Status / control	Not possible
With alarm logging system (incl. buffer and acknowledgment)	
• Number of messages	1 000
• Bit messages	Yes
• Analog messages	Yes
• Message buffer	Ring buffer (n x 256 entries), non-retentive
Recipes	
• Recipes	5
• Data records per recipe	20
• Entries per data record	20
• Recipe memory	32 KB integrated Flash
Number of process images	
• Process images	500
• Variables	1 000
• Limit values	Yes
• Multiplexing	Yes
Image elements	
• Text objects	1 000 text elements
• Graphics object	Bit maps, icons, icon (full-screen)
• Dynamic objects	Bar graphs
Lists	
• Text lists	300
• Graphics list	0
• Libraries	Yes
Security	
• Number of user groups	50
• Passwords exportable	Yes
• Number of user rights	32

OP 77A	6AV6 641-0BA11-0AX1
Functionality under WinCC flexible (continued)	
Recording	
• Recording / Printing	-
Fonts	
• Keyboard fonts	US American (English)
Languages	
• Online languages	5
• Configuration languages	D, GB, F, I, E, CHN "traditional", CHN "simplified", DK, FIN, GR, J, KP / ROK, NL, N, PL, P, RUS, S, CZ / SK, TR, H
• Character sets	WinCC flexible Standard, symbol languages
Transfer (upload / download)	
• Transfer of configuration	MPI / PROFIBUS DP, serial, automatic transfer recognition
Process coupling	
• Connection to controller	S7-200, S7- 300 / 400, Win AC see section on "System interfaces"
Expandability / openness	
• Open Platform Program	No
Dimensions	
Front of enclosure (W x H)	150 x 186
Mounting cutout / device depth (W x H)	135 mm x 171 mm / 38.5 mm device depth
Weight	
Weight	0.5 kg

© Siemens AG 2010

SIMATIC OP 77A

Ordering data

		Order No.
SIMATIC OP 77A	C	**6AV6 641-0BA11-0AX1**
Operator Panel with 4.5" display, monochrome, including mounting accessories		
OP 77A starter package	G	**6AV6 651-1BA01-0AA0**
Consisting of:		
• Operator Panel OP 77A		
• SIMATIC WinCC flexible Compact engineering software		
• SIMATIC HMI Manual Collection (CD), 5 languages (En, Fr, Ger, It, Sp), comprising all currently available user manuals, manuals and communication manuals for SIMATIC HMI		
• MPI cable (5 m) (for download and test purposes only)		
• RS232/PPI multi-master cable (for download and image booting)		
Configuring		
with SIMATIC WinCC flexible		see HMI software chapter 4
Configuration set		
Consisting of: SIMATIC WinCC flexible Compact engineering software, SIMATIC HMI Manual Collection (DVD), 5 languages (English, French, German, Italian, and Spanish), USB/PPI cable Multimaster, PC/PPI cable Multimaster, MPI cable (5 m)	G	**6AV6 621-0AA01-0AA0**
Documentation (to be ordered separately)		
User Manual WinCC flexible Compact / Standard / Advanced		
• German		**6AV6 691-1AB01-3AA0**
• English		**6AV6 691-1AB01-3AB0**
• French		**6AV6 691-1AB01-3AC0**
• Italian		**6AV6 691-1AB01-3AD0**
• Spanish		**6AV6 691-1AB01-3AE0**
User Manual WinCC flexible Communication		
• German		**6AV6 691-1CA01-3AA0**
• English		**6AV6 691-1CA01-3AB0**
• French		**6AV6 691-1CA01-3AC0**
• Italian		**6AV6 691-1CA01-3AD0**
• Spanish		**6AV6 691-1CA01-3AE0**
SIMATIC HMI Manual Collection	A	**6AV6 691-1SA01-0AX0**
Electronic documentation, on DVD		
5 languages (English, French, German, Italian and Spanish); contains: all currently available user manuals, manuals and communication manuals for SIMATIC HMI		
Accessories for supplementary ordering		see HMI Accessories page 2/160 onwards

C: Subject to export regulations: AL: N and ECCN: EAR99T
G: Subject to export regulations: AL: N and ECCN: 5D992

Dimensions

All specifications in mm. Panel cutout see technical specifications.

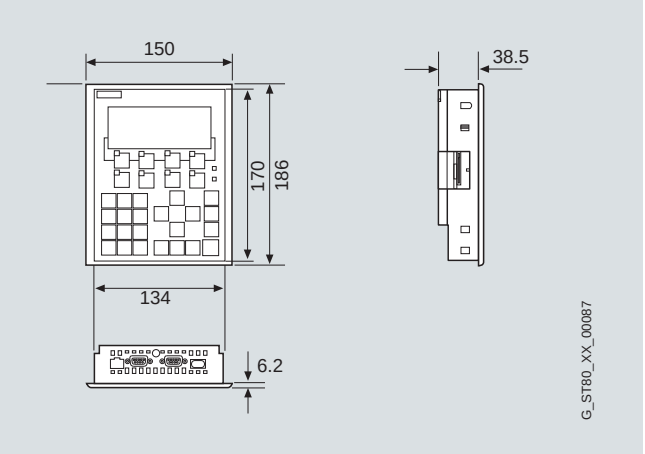

SIMATIC OP 77A

Further information

Further information is available in the Internet under:

http://www.siemens.com/simatic-panels

Note:

Do you need a specific modification or option for the products described here? Then look up "Customized products", where you will find information about additional sector-specific products that can be ordered as well as about options for customer-specific modification and adaptation.